



RESOURCES

888-310-4393 | www.bk-resources.com

BKHS Handsink Installation



Hardware Included:




Wall Bracket



Screws

STEP 1. Each BK Resources handsink is provided with a wall bracket designed to support the sink and provide stability.

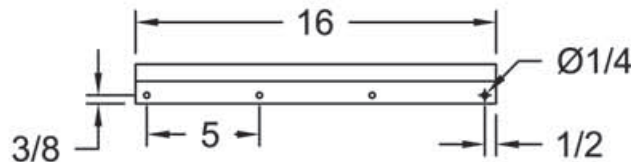

STEP 2. Attach the bracket to the wall in the proper location using the screws provided. The holes will be located at the bottom of the bracket and the top will curve out and not be in contact with the wall. The strongest connection is found when it is attached to a wall stud or other supportive item.

STEP 3. Attach any faucets and drains to the sink that are needed.

STEP 4. Place the back side of the sink against the mounting wall slightly above the bracket and slide it downward until the lip on the back of the sink slides into the top of the mounting bracket.

STEP 5. Once the sink is secure, you may plumb in the water lines and drain pipes to the sink.

