

Commercial Jacketed Storage Tanks



Photo is of
M-3-ST80R5

The Commercial Jacketed Storage Tank Models Feature:

- **Applications**—Designed for use with boilers, hot water circulation systems and large dump volume applications.
- **Vitraglas® Lining**—An exclusively engineered enamel formula that provides superior tank protection from the highly corrosive effects of hot water. This formula (Vitraglas®) is fused to the steel surface by firing at a temperature of over 1600°F (871°C).
- **Optional ASME Construction Available**—M-3-ST200R5A comes standard with ASME construction.
- **Insulation System**—2" (51mm) Non-CFC foam covers the sides and top of the tank, reducing heat loss. This results in less energy consumption, improved efficiencies, and jacket rigidity.
- **Water Connections**—2" (51mm) NPT factory-installed true dielectric fittings extend water heater life and simplify water line connections (M-3-ST120R5A and M-3-ST200R5A have 2½" (64mm) connections).
- **Rear Connection**—2" (51mm) NPT spud allows for a rear water connection (M-3-ST120R5 and M-3-ST120R5A only).
- **Hand Hole Cleanout**—For removal of accumulated lime and sediment (M-3-ST-120R5 has optional hand hole cleanout).
- **Two Protective Magnesium Anode Rods**—Provide added protection against corrosion for long-term, trouble-free service.
- **Steel Tank**—Heavy gauge steel automatically formed, rolled, and welded.
- **T&P Relief Valve Opening (T&P Not Supplied)**—All models have special tapping on side of tank.
- **¾" (19mm) NPT Aquastat Fitting.**
- **Designed for Storage of Potable Water up to 180°F (82°C).**
- **Low Restrictive Brass Drain Valve**—Durable tamper proof design.



5-Year Limited Tank Warranties / 1-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

MANUFACTURED UNDER ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 5,682,666; 7,634,976; 5,660,165; 5,954,492; 6,056,542; 6,935,280; 5,372,185; 5,485,879; 5,574,822; 7,971,560; 7,992,526; 6,684,821; 6,442,178; 7,334,419; 7,866,168; 7,270,087; 7,007,748; 5,596,952; 6,142,216; 7,699,026; 5,341,770; 7,337,517; 7,665,211; 7,665,210; 7,063,132; 7,063,133; 7,559,293; 7,900,589; 5,943,984; 8,082,888; 5,988,117; 7,621,238; 7,650,859; 5,761,379; 7,409,925; 5,277,171; 8,146,772; 7,458,341; 2,262,174. OTHER U.S. AND FOREIGN PATENT APPLICATIONS PENDING. CURRENT CANADIAN PATENTS: 2,314,845; 2,504,824; 2,108,186; 2,143,031; 2,409,271; 2,548,958; 2,112,515; 2,476,685; 2,239,007; 2,092,105; 2,107,012. Vitraglas® is a registered trademark of Bradford White® Corporation.

Commercial Storage Tanks

Jacketed Small Volume Models


Meet or exceed ASHRAE 90.1b (current standard)

Model Number	Capacity		A Floor to Heater Top	B Jacket Dia.	C Floor to T&P Conn.	D Floor to Hot Water Conn.	E Floor to Aquastat & Top Circ. Conn.	F Floor to Bottom Circ. Conn.	G Floor to Drain	H Floor to Hand Hole Cleanout	J Floor to Rear Water Conn.	Water Conn. Size.†	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	lbs.
M-3-ST80R5	80	67	58 ³ / ₄	24	52 ¹ / ₂	59 ³ / ₄	14 ¹ / ₄	9 ¹ / ₄	4 ³ / ₄	7 ¹ / ₄	—	2(F&T)	192
M-3-ST80R5A*	80	67	58 ³ / ₄	24	52 ¹ / ₂	59 ³ / ₄	14 ¹ / ₄	9 ¹ / ₄	4 ³ / ₄	7 ¹ / ₄	—	2(F&T)	278
M-3-ST120R5	119	100	62 ¹ / ₂	28	55 ³ / ₄	63 ¹ / ₂	14 ¹ / ₂	9 ¹ / ₂	5	—	9 ¹ / ₂	2(F&T), 2(R)	312
M-3-ST120R5A*	119	100	62 ¹ / ₂	28	55 ³ / ₄	63 ¹ / ₂	14 ¹ / ₂	9 ¹ / ₂	5	7 ¹ / ₂	9 ¹ / ₂	2 ¹ / ₂ (F&T), 2(R)	366
M-3-ST200R5A*	200	167	77	32	66	78	16 ¹ / ₄	11 ¹ / ₄	6 ³ / ₄	9 ¹ / ₄	—	2 ¹ / ₂ (F&T)	633

Model Number	Capacity		A Floor to Heater Top	B Jacket Dia.	C Floor to T&P Conn.	D Floor to Hot Water Conn.	E Floor to Aquastat & Top Circ. Conn.	F Floor to Bottom Circ. Conn.	G Floor to Drain	H Floor to Hand Hole Cleanout	J Floor to Rear Water Conn.	Water Conn. Size.†	Approx. Shipping Weight
	Liters		mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	kg.
M-3-ST80R5	303		1492	610	1334	1518	362	235	121	184	—	51(F&T)	87
M-3-ST80R5A*	303		1492	610	1334	1518	362	235	121	184	—	51(F&T)	126
M-3-ST120R5	450		1588	711	1416	1613	368	241	127	—	241	51(F&T), 51(R)	142
M-3-ST120R5A*	450		1588	711	1416	1613	368	241	127	191	241	64(F&T), 51(R)	166
M-3-ST200R5A*	751		1956	813	1676	1981	413	286	171	235	—	64(F&T)	287

*Meets American Society of Mechanical Engineers (ASME) Code.

†F=Front Water Connections. R= Rear Water Connections.

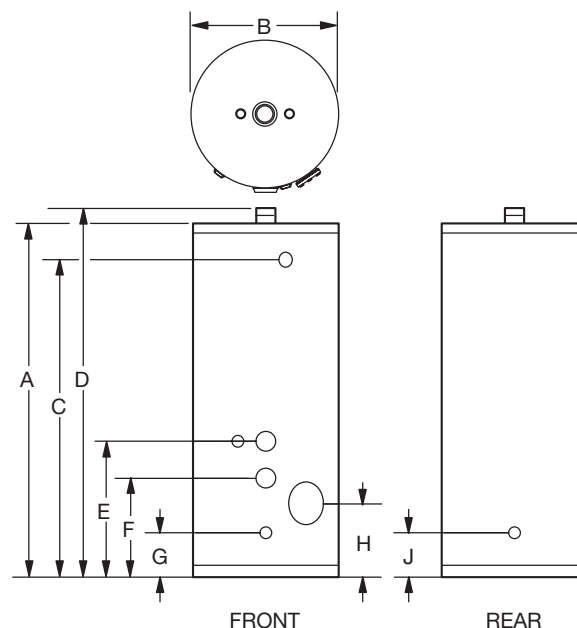

General

Water connections 2" (51mm) NPT (except where noted). T&P tapping 1" (25mm) NPT. Aquastat tapping 3/4" (19mm) NPT.

All models certified at 300 psi test pressure (2068 kPa) and 150 psi working pressure (1034 kPa).

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



Ambler, PA

For U.S. and Canada field service, contact your professional installer or local Bradford White sales representative.

Sales 800-523-2931 • Fax 215-641-1670 / Technical Support 800-334-3393 • Fax 269-795-1089 • Warranty 800-531-2111 • Fax 269-795-1089

International: Telephone 215-641-9400 • Telefax 215-641-9750 / www.bradfordwhite.com



BRADFORD WHITE-CANADA® INC. Sales / Technical Support 866-690-0961 / 905-238-0100 • Fax 905-238-0105 / www.bradfordwhite.com

Built to be the Best™

©2017, Bradford White Corporation. All rights reserved.