

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

SWB00 3/4" ID Coated Stainless Steel Water Heater Connector – Female Iron Pipe x Female Iron Pipe


Use: For use in exposed locations only to connect water heaters, water softeners and other water connected devices to the water supply

Design Features:

- **Proprietary ProCoat® clear coat** provides unrivaled corrosion protection from harsh chemicals that can cause surface deterioration and pinhole leaks.
- **Full flow, maximum performance.** 3/4" internal diameter provides greater water flow without obstruction
- **Integrated dielectric sleeve** effectively isolates dissimilar metals within the waterway to help prevent galvanic and electrolytic corrosion
- **Less torque to seal** against the pliable rubber washer, especially on rough nipple surfaces
- **Longer connector nuts** allow a greater number of thread-to-thread contacts and a better seal
- **100% leak tested** prior to coating application to ensure connector performance and reliability
- 

Operating Specifications:

Temperature: 40° - 180° F
Water Pressure: 125 PSI maximum

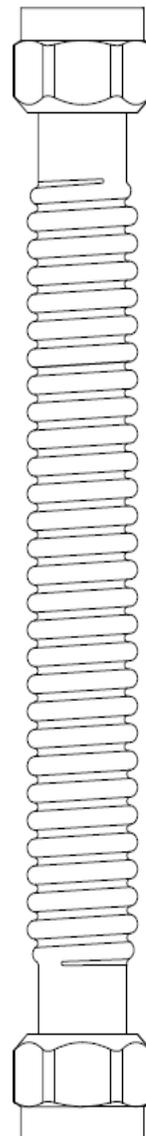

CONNECTOR MATERIAL SPECIFICATIONS


Tubing	Stainless steel
Dielectric Sleeve	Polypropylene
Nut	Steel, plated
Washer	Rubber

Part Listing:

- SWB00-12N 3/4" ID X 12" connector with 3/4" FIP x 3/4" FIP end fittings
- SWB00-15N 3/4" ID X 15" connector with 3/4" FIP x 3/4" FIP end fittings
- SWB00-18N 3/4" ID X 18" connector with 3/4" FIP x 3/4" FIP end fittings
- SWB00-24N 3/4" ID X 24" connector with 3/4" FIP x 3/4" FIP end fittings

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

SWB00 3/4" ID Coated Stainless Steel Water Heater Connector – Female Iron Pipe x Female Iron Pipe

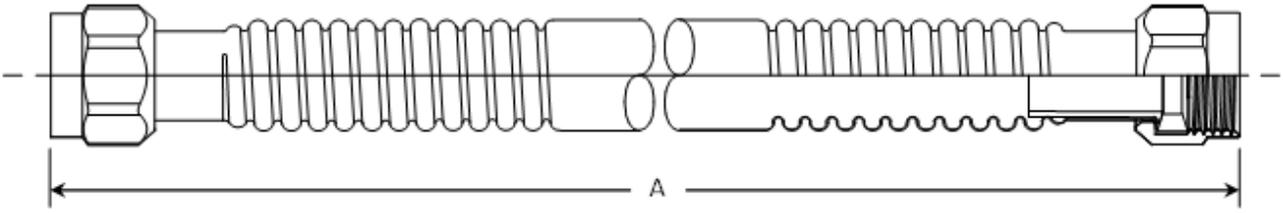

PART DIMENSIONS (Inches)					
Connector Length – Nut by Nut					
Model	Dim.	12"	15"	18"	24"
SWB00	A	12.00 min.	15.00 min.	18.00 min.	24.00 min.

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

300.41 SWB00 Coated Stainless Steel Wtr Htr Conn REV 9.19



©2019 Brasscraft Manufacturing Company