



60" x 32" alcove bath, right drain **K-1123-RA** 

**Archer®** 

#### **Features**

- Comfort Depth® design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral apron
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Textured bottom surface
- Coordinates with other products in the Archer collection

## Material

Acrylic

#### Installation

- Right drain
- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately)
- Alcove

# **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

## **Recommended Products/Accessories**

K-23726 Drain treatment

K-31797 Slotted overflow bath drain kit

K-31795 Slotted overflow above-the-floor bath drain kit



# ADA

## Codes/Standards

CSA B45.5/IAPMO Z124 ADA

ICC/ANSI A117.1

# **KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty**

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.


| Color | Code | Description  |
|-------|------|--------------|
|       | 0    | White        |
|       | 96   | Biscuit      |
|       | 95   | Ice™ Grey    |
|       | 7    | Black Black™ |





# **Archer®**

60" x 32" alcove bath, right drain **K-1123-RA** 

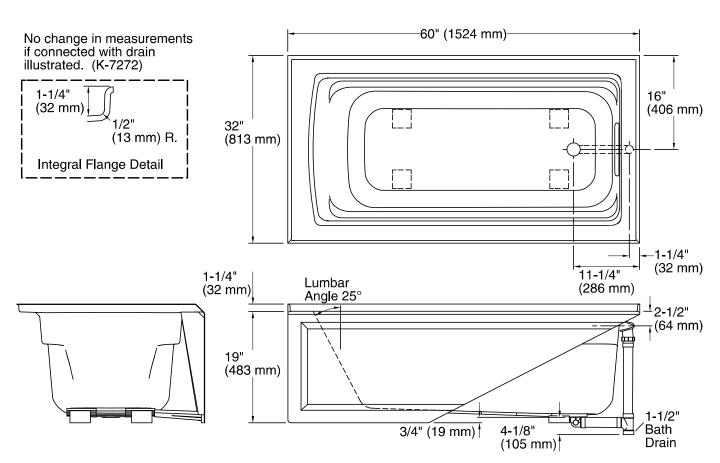

#### **Technical Information**

All product dimensions are nominal.

Drain location: Right

Basin area, bottom: 45-1/8" x 19-11/16" (1146 mm x

500 mm)

Basin area, top: 52-3/4" x 25-5/16" (1340 mm x 643 mm)

Weight: 80 lbs (36.3 kg)

Minimum floor load: 45 lbs/ft² (219.7 kg/m²)

Water depth: 15" (381 mm)

Water capacity: 58 gal (219.6 L)

Minimum flat for 2-9/16" (65 mm)

door:

#### **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will

ADA compliant when installed to the specific requirements of these regulations.

