



Two-piece elongated toilet, 1.28 gpf K-3837

#### **Features**

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Combination consists of the K-4397 bowl and the K-4438 tank
- Coordinates with other products in the Devonshire collection
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Eligible for consumer rebates in some municipalities
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) fully glazed trapway
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush

#### Installation

- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation
- Seat and supply line sold separately

### **Recommended Products/Accessories**

K-4733-RL Glenbury™ ReadyLatch® Quiet-Close™ elongated toilet seat

K-5588 Purefresh® Deodorizing elongated toilet seat K-4108 PureWash® E750 Elongated bidet toilet seat with remote control

K-5420 Low-Profile Bolt Caps

K-9167-L Trip Lever

1023457 Wax Ring/Hardware Kit

1265114 Connector Hose

K-23726 Drain treatment

# **Included Components**

K-4397 Elongated toilet bowl K-4438 Toilet tank, 1.28 gpf





## Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

# **KOHLER® Toilets and Seats Limited Warranty**


See website for detailed warranty information.







Two-piece elongated toilet, 1.28 gpf K-3837

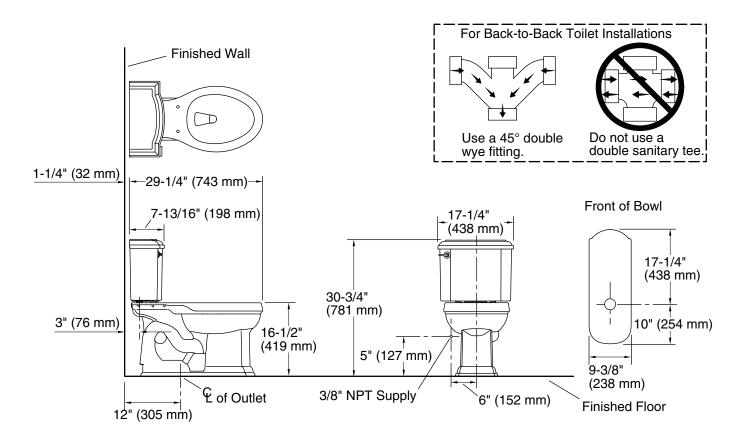

## **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: AquaPiston
Trap passageway: 2-1/8" (54 mm)

Water surface size: 11-1/2" x 8-3/4" (292 mm x 222 mm)

Rim to water 5-1/2" (140 mm)

surface:

Rough-in: 12" (305 mm)
Seat-mounting 5-1/2" (140 mm)

holes:

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

