Branham™



Wash-down full-stall 0.5–1.0 gpf urinal, top spud K-4920-T

Features

- Washout urinal
- 3/4" (19 mm) top spud
- One gallon or less per flush

Material

Vitreous china

Recommended Replacements

 This product is replaced by K-25039-T Full stall washout urinal with top spud.

Recommended Products/Accessories

K-9172 Urinal Strainer K-9183 Urinal Strainer K-23726 Drain treatment K-23725 Cast iron cleaner K-76318 Urinal flushometer, 0.5 gpf K-76319 Urinal flushometer, 1.0 gpf



ADA CSA B651

Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER® One-Year Limited Warranty


See website for detailed warranty information.







Wash-down full-stall 0.5–1.0 gpf urinal, top spud K-4920-T

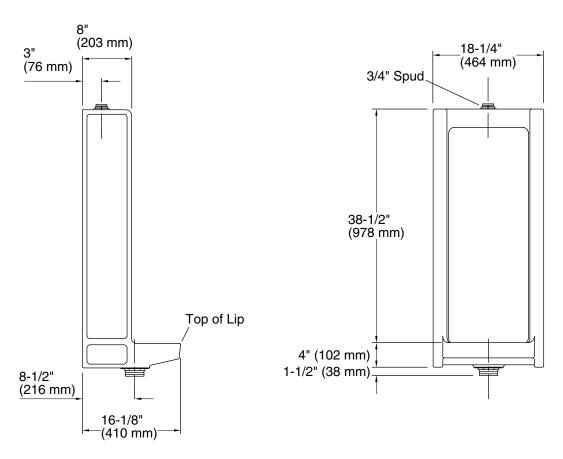

Technical Information

All product dimensions are nominal.

Spud size: Inlet, Top
Min. Water per 0.5 gpf (1 lpf)

Flush:

Max. Water per 1 gpf (3.8 lpf)

Flush:

Designed for the above water use when installed with a water-saving flushometer.

Notes

Install this product according to the installation guide.

Refer to manufacturer's instructions and local codes for flushometer requirements.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

