



## Product Image

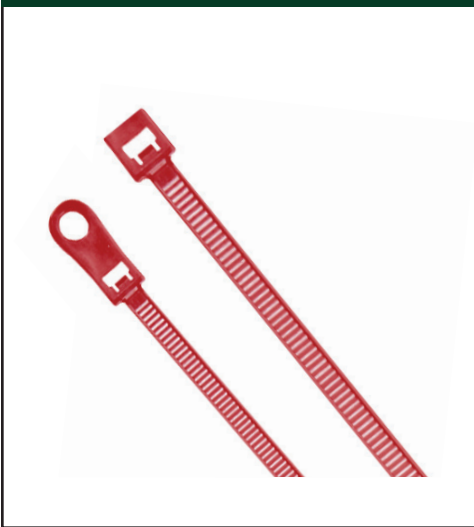

## Air Handling Cable Ties


Air handling nylon cable ties are used for air handling spaces above drop ceilings and below raised flooring. They are suitable for use in Air Handling spaces in accordance with Section 300.22(C) and (D) of the National Electrical Code and Rules 12-010 (3), (4), and (5) and 12-020 of the Canadian Electrical Code, Part 1.

## Dimensional Data – Air Handling Cable Ties



PN#	Length (L)	Width (W)	Bundle Diameter		Min. Loop Tensile Strength			UL94 Flamability	Plenum Rating
			Min.	Max.	N	kgf	lbf		
DTP6	200mm (7.87")	4.8mm (0.19")	3mm (0.12")	50mm (1.97")	222	22.6	50	V-2	AH-2
DTP11	280mm (11.02")	4.8mm (0.19")	3mm (0.12")	70mm (2.76")	222	22.6	50	V-2	AH-2

## Dimensional Data – Air Handling Cable Ties

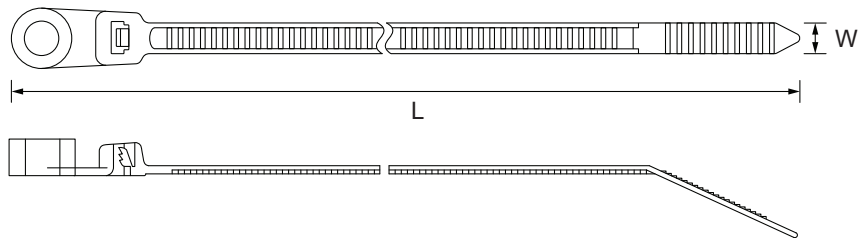

PN#	Length (L)	Width (W)	Bundle Diameter		Min. Loop Tensile Strength			Mounting Hole Diameter	UL94 Flamability
			Min.	Max.	N	kgf	lbf		
DTMP6	200mm 7.87"	4.8mm 0.19"	3mm 0.12"	47mm 1.85"	222	22.6	50	5.2mm 0.20"	V-2