

Permanent Split Capacitor Ventilation Direct Drive Blower 5.0" & 5.6" Diameter, Open Air Over




APPLICATIONS:

Designed to meet manufacturer's requirements for direct drive ventilation units.

FEATURES:

- Capacitor Included And Mounted On PSC Models
- Automatic Reset Thermal Overload Protector
- Continuous Duty
- Ball Bearings Unless Noted
- 40°C Ambient Rated
- 1.0 Service Factor
- **Discount Symbol: DS-3HAC**

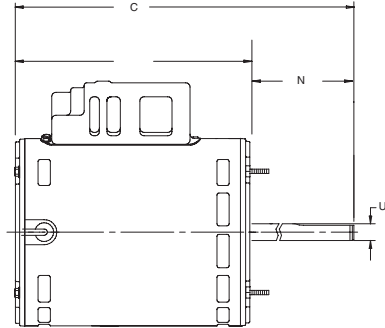

HP	RPM/Spd.	Voltage	Catalog Number	List	Amps	NEMA Frame	Motor Type	Shaft N	Shaft U	Rotation Lead End	Length XI	Total C	Ship Wt.	Notes
1/12	850	115	4740	◆	1.7	48YZ	PSC	3.25	.500	CW	5.81	9.06	10	
1/8	1600	115	1357	◆	1.7	48Y	PSC	3.00	.500	CCW REV	4.06	7.06	8	
1/6	1650	115	4742	◆	2.7	42YZ	PSC	3.25	.500	CW	5.81	9.06	9	
	1100	115	1146	◆	2.2	48YZ	PSC	3.00	.500	CCW REV	3.81	7.36	12	
1/4	1015	115	4153	◆	4.5	48	PSC	1.5	.500	CW	-	10.00	18	
1/3	1650	115	4745	◆	4.0	48YZ	PSC	3.25	.500	CW REV	6.06	9.31	14	
	1100	115	4746	◆	4.4	48YZ	PSC	3.25	.625	CW	5.81	9.06	17	
	1075	115	1145	◆	4.9	48YZ	PSC	3.00	.500	CCW REV	4.81	7.81	15	
1/2	1100	115/230	4749	◆	6.2/3.1	48YZ	PSC	3.30	.625	CW	6.60	9.90	18	
	1650	115/230	4748	◆	8.0/4.0	48YZ	PSC	3.25	.625	CW REV	6.31	9.56	22	
3/4	1100	115/230	4750	◆	10.0/5.0	48YZ	PSC	3.25	.625	CW	6.56	9.81	18	

◆ Refer to Motorboss for Pricing

