D-TEK Stratus[™]

REFRIGERANT LEAK DETECTOR AND PORTABLE MONITOR

Find profit-crushing leaks in no time.

D-TEK Stratus combines the excellent leak detection of D-TEK Select and the cloud hunting capability of a large portable monitor all in one hand-held unit. Quickly locate the area containing the leak using the large, easy-to-read LCD display, and then pinpoint the leak with one instrument! D-TEK Stratus is the next big thing in refrigerant leak detection.

PATENT PENDING

Leak Detector Selection Guide on page 19

CERTIFIED

Sinconore

CE

and

A2L




SPEC	 CAT	IONG
	- 7 <u>-</u> 1	

Includes	D-TEK Stratus Infrared sensor Lithium ion battery Spare filters AC wall charger DC car charger Extra-long probe Carrying case Earbuds	
Compatible refrigerants	R22, R32, R134a, R404a, R407c, R410a, R422b, R448a, R449a, R452a, R452b, R507 (AZ50), R1234yf, CO ₂ (requires CO ₂ sensor) ammonia, SF6, and more	
Minimum sensitivity	0.03 oz./yr. (1 g/yr.)	
Sensitivity per EN14624	1g/yr.	
Power source	Lithium ion battery (rechargeable) USB (can operate while charging)	
Battery life	~8 hours (cloud hunting mode) ~10 hours (pinpoint mode)	
Weight	1.07 lb. (490 g)	
Certifications	CE SAEJ2791 SAEJ2913 EN14624:2012 A2L certified	
Probe length (standard probe)	15 in. (38 cm)	
Warranty	Two-year over-the-counter	

ORDERING INFORMATION

D-TEK Stratus	724-202-G1
Accessories and R	Replacement Parts
Earbuds	721-607-G1
TEK-Check R134a reference leak	703-080-G10
Wall charger (US and international)	721-606-G1
12 V (dc) car charger	721-605-G1
Lithium ion battery	721-702-G1
Battery charging cradle	721-610-G1
Battery/cradle combo	721-604-G1
Extra-long probe	721-611-G1
Needle probe extension	721-612-G1
Refrigerant sensor (Detects CFCs, HFCFs, HFCs, and HFOs)	724-701-G1
CO ₂ sensor	724-701-G2
Filter cap	712-705-G1
Filter cartridges	712-707-G1
Carrying case	724-700-G1

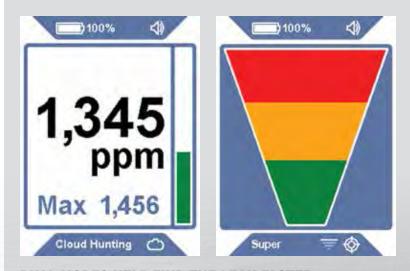

DUAL MODES HELP FIND THE LEAK FASTER

Use the new cloud hunting mode (left) to find the area highest in concentration, then switch to classic pinpoint mode (right) to pinpoint the leak.

ADVANTAGES

- Sensitivity of 0.03 oz./year (1 g/year)
- Innovative cloud hunting mode with ppm readout helps locate leaks faster than ever
- Cloud hunting and pinpoint modes is like having two leak detectors in one
- Detects all CFCs, HCFCs, HFCs, and HFOs
- All new, redesigned infrared sensor
- Longest sensor life in the industry
- Easy field replacement
- New lithium ion battery
 - Quick charge capability
 - Easy field replacement
- Automatic and manual zero modes
- Sensitivity will not degrade over time
- Rugged carrying case included



WATCH OUR VIDEO!