



## N/O Solid State Relay


Specifications & Dimensions

PN 21304


### Specifications

<b>Relay Type:</b>	Form A (NO) SPST
<b>Compatible controllers:</b>	KE2 Evap OEM, KE2 Evaporator Efficiency, KE2 Case Control, KE2 Evap RE2, KE2 Compressor Sequencer OEM
<b>Relay functions (when used with certain controllers):</b>	PWM Valve control, Digital Unloader Valve control, Alarm Output
<b>Ambient Temp:</b>	-40°F to 257°F (-40°C to 125°C)
<b>Operating Temp:</b>	-40°F to 176°F (-40°C to 80°C)
<b>Load Voltage:</b>	24-280 VAC
<b>Rated Load Current:</b>	10 A

### Dimensions - Inches [mm]

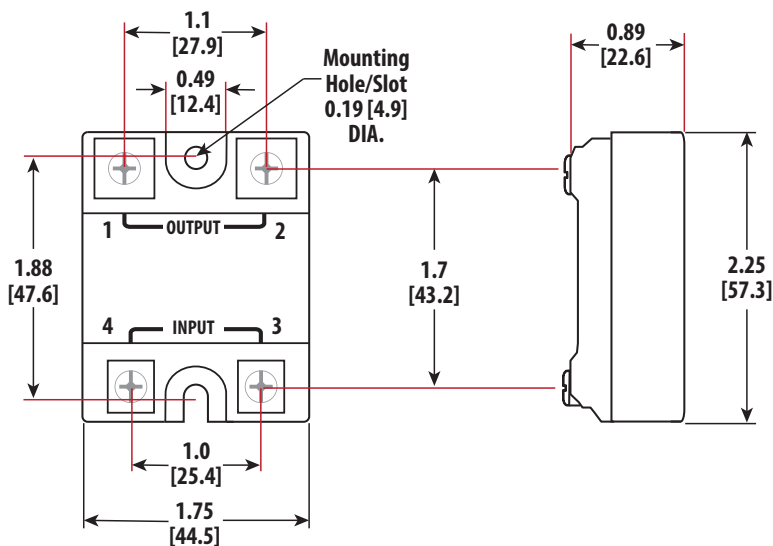

### General Wiring Diagram

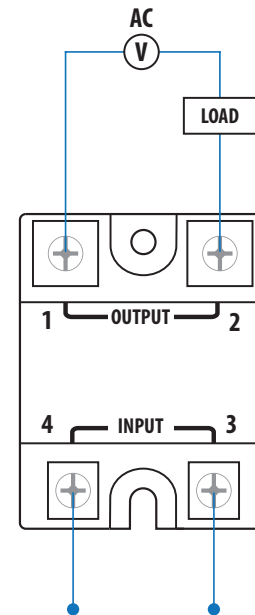

KE2 Evap OEM, KE2 Evap Efficiency, KE2 Case Control,  
KE2 Evap RE2, KE2 Compressor Sequencer OEM  
(See specific controller literature for wiring diagram)