

Dampers & Components




Work. Perform. Outlast.
Limited Lifetime Warranty

Dampers

Malco 28 Gauge Dampers feature 1/4 in. (6.4 mm) bearings, allowing bearing holes to be made in round duct with the use of a scratch awl. Squeeze pipe so that it is oval shaped. Insert damper into pre-punched bearing hole(s). Pipe will spring back to round when released. Secure with wing nut(s) provided. Damper may be adjusted with screwdriver or optional damper handle. Available with or without handles. *See below.*



D8HT100




D7HT100



D6HT100



D6100



D4AST

Bulk Components



WN100
(100 pack) Wingnuts




H1100
(100 pack) Damper Handles

Damper Regulator Hardware

- Fast installing hammer-on design.
- For use on 30-24 gauge (0.41-0.71 mm) galvanized steel.
- Standard 5/16 in. (8 mm) threads. / Packaged 12 sets per bag.
- **Note: Not for stove pipe:** Use only for air handling applications where temperature does not exceed 350°F (176°C).

Single Bearing / Spring Loaded:


1-spring bearing / 1-inside washer / 1-handle / 1-wing nut



DR69

Double Bearing :


2-spring bearing / 1-inside washer / 1-handle / 1-wing nut

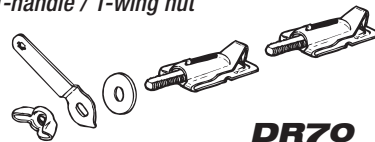

DR70

Double Bearing :

1-spring bearing / 1-fixed tip / 1-inside washer / 1-handle / 1-wing nut

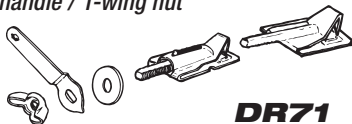

DR71

Catalog Number	Pipe Diameter in. (mm)	Bearing
<i>Standard Dampers, including Wingnuts (Unassembled) 28 Gauge (0.48 mm) 100 packs</i>		
D5100	5 (127)	single
D6100	6 (152)	single
D6HT100	6 (152)	double
D7HT100	7 (178)	double
D8HT100	8 (203)	double
<i>Standard Dampers, including Wingnuts (Pre-assembled) 28 Gauge (0.48 mm) 100 packs</i>		
D4AST	4 (102)	single
D5AST	5 (127)	single
D6AST	6 (152)	single
D7AST	7 (178)	single
D8AST	8 (203)	single
D6HTAST	6 (152)	double
D7HTAST	7 (178)	double
D8HTAST	8 (203)	double



CAUTION: Malco Dampers are designed for forced air systems, they are not capable of being used in wood, coal, or other similar systems.