


WORLD SOURCE VIBRATION ELIMINATORS (IMPORT)

UL & CE
APPROVED

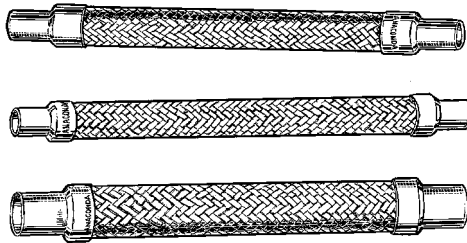

SUITABLE FOR USE WITH REFRIGERANTS

R12	R401A	R407A	R410A
R22	R401B	R407B	R410B
R23	R402A	R407C	R502
R125	R402B	R408A	R507
R134A	R404A	R409A	R508
			R509

STAINLESS STEEL VIBRATION ELIMINATORS WITH FEMALE COPPER ENDS

Part No.	Actual OD of Copper Tubing (in.)	Dimensions (in.)					Max. Working Pressure (psig.)	Burst Pressure (psig.)
		A. (I,D)	B (±1/8)	C (±1/8)	D (±1/4)	E (±1/16)		
VE14OD	1/4	1/4	3/4	6-5/8	8-1/16	1/2	500	2500
VE38OD	3/8	3/8	13/16	6-15/16	8-9/16	1/2	500	2500
VE12OD	1/2	1/2	7/8	7-1/4	9	1/2	500	2500
VE58OD	5/8	5/8	15/16	8	9-7/8	11/16	500	2500
VE34OD	3/4	3/4	1-1/4	8-1/16	10-9/16	11/16	500	2500
VE78OD	7/8	7/8	1-7/16	9-1/8	12	13/16	500	2500
VE118OD	1-1/8	1-1/8	1-13/16	9-7/16	13-1/16	13/16	500	2500
VE138OD	1-3/8	1-3/8	2	11-1/2	15-9/16	7/8	500	2500
VE158OD	1-5/8	1-5/8	2-1/4	12-3/8	16-7/8	15/16	500	2500
VE218OD	2-1/8	2-1/8	2-3/4	15-3/16	20-5/8	15/16	390	1950
VE258OD	2-5/8	2-5/8	3-1/8	18-1/16	24-5/16	1-1/4	340	1700
VE318OD	3-1/8	3-1/8	3-7/16	20	26-15/16	1-1/2	300	1500
VE358OD	3-5/8	3-5/8	4-1/8	24	32-3/16	1-9/16	175	525
VE418OD	4-1/8	4-1/8	4-7/16	24	32-15/16	1-9/16	175	525

EACH UNIT IS SEALED WITH DESICCANT IN PLASTIC BAGS AND INDIVIDUALLY BOXED.

