


Mueller Streamline Co. Headquarters

150 Schilling Blvd
Suite 201
Collierville, Tennessee 38017
United States
Phone: 901 753 3200

Mueller Streamline Co. International

525 Okeechobee Blvd
Suite 860
West Palm Beach, FL 33401
United States
Phone: 561 273 8300

ITEM # A 16308, BRASS COMPRESSOR VALVES - DOUBLE PORT, SOLDER

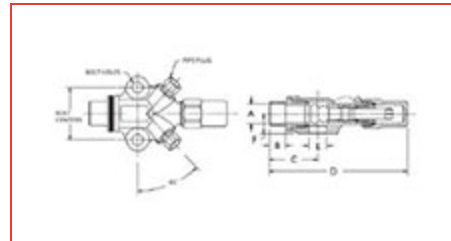

[Specifications](#) | [Dimensions](#) | [References](#) | [Torque To Seal](#)

Specifications

Connection Size	1/2 in
MAP	48 bar 700 psi
Valve Weight	0.86 lb 0.39 kg
Valve Kit Weight	0.90 lb 0.41 kg
Operating Temperature [Min]	-40 °C -40 °F
Operating Temperature [Max]	149 °C 300 °F
Seat Position	Front

Dimensions

A	1/2 in 13 mm
B	0.38 in 10 mm
C	1.4 in 36 mm
D	4.20 in 107 mm
E	0.56 in 14 mm
F	0.62 in 16 mm
Bolt Centers	1 5/8 in 41 mm
Bolt Hole Diameter	0.34 in 9 mm
Pipe Plug Size	1/8 in
Flange Thickness	7/8 in 22 mm

References

Valve Kit Part Number	A 17511
Body Number	A 09464
Standard Seal Cap	A 04566
Standard Seal Cap-Material	Steel
Replacement Seal Cap -Plastic	P 34627
Replacement Seal Cap-Brass	A 16474
Replacement Seal Cap-Steel	A 04566

Replacement Kit

A 17420

Torque To Seal**Front Seat**14 to 18 ft·lb
19 to 24 N·m**Back Seat**14 to 18 ft·lb
19 to 24 N·m**Pack Gland**8 to 12 ft·lb
11 to 16 N·m**Pipe Plug**

2 - 3 Threads Exposed

Brass Cap20 to 30 ft·lb
27 to 41 N·m**Steel Cap**3 to 5 ft·lb
4 to 7 N·m