


Permanent Split Capacitor Direct Drive Fan 3.3" Diameter, Open and Totally Enclosed Designs

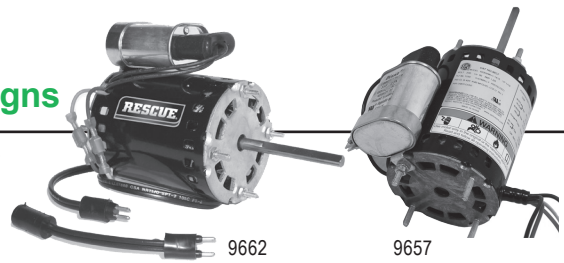

APPLICATIONS:

High efficiency PSC motors for refrigeration evaporator and general purpose.

FEATURES:

- Four 8-32 x 1/2" Stud Extensions At Each End
- Ball Bearings Have All Angle Thrust System
- Automatic Reset Thermal Overload Protector
- 9656 and 9662 feature dual plug cord for flexibility
- Dual Studs
- PSC Design with Capacitor Included
- 12" Leads

Open Air Over

HP	RPM	Voltage	Catalog Number	List	Enclosures	Rotation	Amps	Shell Length	Shaft Dia. x Length*	Ship Wt.	Notes
1/20	1550	115	9632	◆	OAO	Rev	0.85	3.3	5/16 x 2 .38	4	
1/12-1/20	1550	115/230	9664	◆	OAO	Rev	1.2-0.95/0.6-0.5	4.2	5/16 x 2 .50	5	
	1550	115/230	9721	◆	OAO	Rev	1.1/0.57	3.8	5/16 x 3.25	4	
1/10	1550	230	9657	◆	OAO	Rev	1.00	4.5	5/16 x 3 .75	6	

Totally Enclosed, Air Over

HP	RPM	Voltage	Catalog Number	List	Enclosures	Rotation	Amps	Shell Length	Shaft Dia. x Length*	Ship Wt.	Notes
1/50	1550	115	9641	◆	TEAO	Rev	0.5	3.06	1/4 x 2 .25	5	
1/50-1/70	1550	115	9624	◆	TEAO	Rev	0.43-0.37	3.06	1/4 x 2 .50	3	
1/30-1/40	1550	115	9628	◆	TEAO	Rev	0.6-0.55	3.25	5/16 x 2 .50	4	

OEM Direct Replacements

HP	RPM	Voltage	Catalog Number	List	Enclosures	Rotation	Amps	Shell Length	Shaft Dia. x Length*	Ship Wt.	Notes	OEM
1/20	1550	115	9662	◆	OAO	Rev	0.85	3.25	5/16 X 3.0	4	H30	BO
	1550	230	9648	◆	TEAO	Rev	0.36	3.25	5/16 x 2.26	4		FE
	1550	115/230	9654	◆	TEAO	CW	0.8/0.4	3.4	5/16 x 1 .63	4	H31	KR
1/15	1550	230	9656	◆	OAO	Rev	0.48	3.77	5/16 x 3 .0	4	H30	BO

BO = Bohn FE = Fedders KR = Krack

◆ Refer to Motorboss for Pricing

Note H30: Includes Special Cord And Plug

Note H31: Includes Special Mounting Lugs, No Threaded Studs

