

RESCUE® ECM Refrigeration Motor

APPLICATIONS:

High efficient ECM motor designed as a Universal drop-in replacement



EC5411

FEATURES:

- IP66: Dust Tight with All Angle Moisture Protection
- Suitable for use in Evaporator and Condenser Applications
- High Efficiency up to 65%
- Universal Mounting
- Standard 3 hole style/Hussmann 4 hole on back of motor
- Double Pedestal
- Thermally Protected
- Robust Ball Bearing System
- Aluminum Frame
- Standard Shaft Size 1/4-20 thread

NEW

HP	RPM/ Spds	Voltage	Catalog Number	List	Amps	Rotation	Shaft N	Total C	Shaft Diameter	Ship Wt.	Notes
4-25W	1550-1725	115	EC5411	\$108	.2-.75	CWOSE	0.425	2.9	0.250	2.0	-
4-25W	1550-1725	115	EC5412	\$108	.2-.75	CCWOSE	0.425	2.9	0.250	2.0	-

Kit 58 adapter available to be used when replacing rectangular, 51 frame, ECM motors to adjust for fan position or when a flat mounting surface is needed. List Price \$13.00




Kit 58

RESCUE® PSC Direct Drive Fan 3.3" Diameter, Open Air Over

APPLICATIONS:

Designed to meet manufacturer's requirements for fans & blowers.

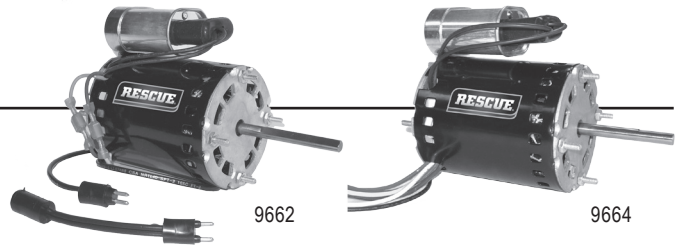


9662

9664

FEATURES:

- Four 8-32 x 3/4" Stud Extensions At Each End
- Ball Bearings Have All Angle Thrust System
- Automatic Reset Thermal Overload Protector
- Reversible Rotation
- PSC Design with Capacitor Included
- 12" Leads
- Discount Symbol: DS-3HAC

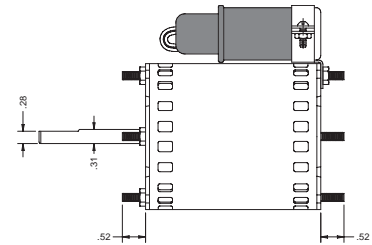

Open Air Over

HP	RPM	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shell Length	Shaft Dia. x Length*	Ship Wt.	Notes	OEM
1/20	1550	115	9662	\$115	OAO	3	0.85	3.3	0.31 X 3.0	4	H30	BO, LA
1/15	1550	208-230	9656	\$112	OAO	2*	0.48	4.2	0.31 x 3.0	4	H30	BO, LA
1/12-1/20	1550	115/230	9664	\$111	OAO	5	1.3/0.7	4.2	0.31 x 2.5	4		BO, LA

BO = Bohn®† LA = Larkin®†

* 440 VAC Capacitor

Note H30: Includes Special Cord And Plug

† All marks shown within this document are properties of their respective owners.

