



PCD110XP

(Ceiling Mounted Exhaust Fan with DC Motor)

Submittal

FEATURES

- Adjustable time delay from Off to 60 minutes, humidity sensor, motion sensor functionality built in (can be disabled) (motion grille sold separately)
- Built-in high speed toggle switches allow for 80CFM/110CFM/140CFM selection with AutoFlo technology.
- Continuous low speed operation (optional) with auto boost to high speed based on humidity, motion, or manual override
- AutoFlo™ feature automatically changes the fan speed (RPM) to keep up with the actual static pressure in the duct system. Kindly refer to the fan performance curves for more information.
- 6" duct connector with back draft damper
- Galvanized steel construction
- Extremely quiet (0.4 Sones max) operation
- Energy efficient model far exceeding Energy Star efficiency requirements




PERFORMANCE (HVI Certified)

PCD110XP HVI CERTIFIED PERFORMANCE										
Ducting	Discharge	Speed Setting	SP	Rated CFM	Rated Sones	Rated Watts	ESTAR	Meets OR, VT Efficiency Requirements	Meets DC, MD, NJ, NY, RI Efficiency Requirements	Meets CO, MA, WA Efficiency Requirements
6"	Horizontal	HS	0.25	136	1	21	Yes	Yes	Yes	Yes
		LS	0.25	80	1	11.1				
		MS	0.25	108	0.8	15				
		MS	0.1	110	0.3	9				
		LS	0.1	80	0.3	6				
		HS	0.1	140	0.4	13				

*Maximum power was tested at 32.4 watts

S&P USA PERFORMANCE CURVES

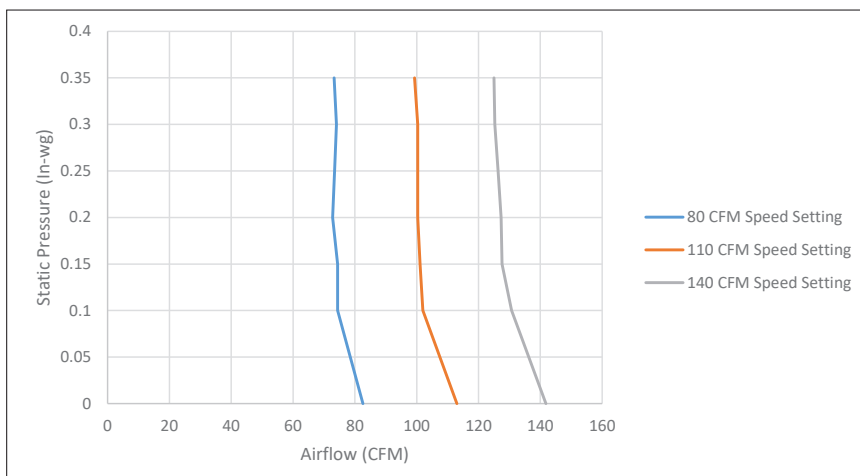

DIMENSIONS

