



SUBMITTAL DATA SHEET



A CSW Industrials Company

Mini White Silent+

Univolt 110-250 VAC 50/60Hz
83930 (ASP-MWS+UNI)

Project Information:

Job Name:

Location:

Engineer:

Submitted to:

For: Reference Approval Construction

Submitted by:

Reference:

Submittal Information:

Approval:

Date:

Construction:

Unit #:

Drawing #:

Pump Type	Rotary Diaphragm
Pump Length	11.1" / 11.5" w/ Cover Plate
Pump Width	1.7" / 1.9" w/ Cover Plate
Pump Height	2.1" / 2.6" w/ Cover Plate
Capacity	12 GPH @ 0' Head / 6 GPH @ 33'
Max BTUs	54,000
Max Head in Feet	33
Max Temperature	104°F
Max Suction Lift	N/A
Sound Level	19dB(A) @ 3'
Dry Contact Rating	5A NC
Voltage	100-250v
Amperes	.18
Watts	2.1
Remote Reservoir	N
Plenum Rated	N

Sound level and pump performance varies with voltage frequency.

(Sec. II) Ordering Information:

Product Code	83930
Model	ASP-MWS+UNI
Carton Qty	1
Carton Weight	2lbs


(Sec. III) Carton Contents:

- Pump assembly
- Cover Plate
- Screw hole covers (2)
- Zip tie 5.5" x 1/8" (3)
- Screws (2)
- Wall Anchors (2)
- Male to Male Adaptor (outlet to tubing)
- 90 Degree Outlet Pipe Connector
- Inline Fuse
- Install Template
- Install Manual

(Fig. I) Product Image:



(Fig. II) Typical Pump Locations:

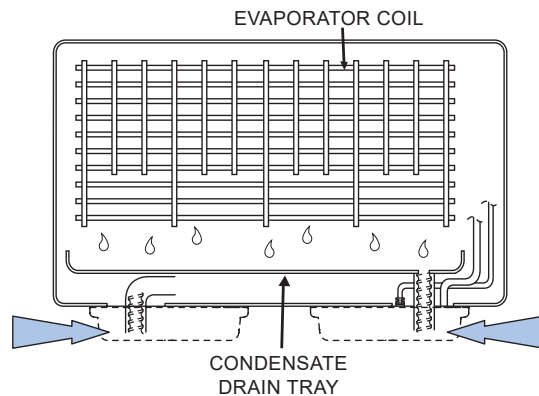

Pump Selector & Wiring Diagrams Available at
www.rectorseal.com/aspenn-mini



(RectorSeal's products are subject to continuous improvements; RectorSeal reserves the right to modify product design, specifications & information in this data sheet without notice and without incurring any obligations)

ASPEN® is a registered trademark of Aspen Oldco Limited Company UK

Mini White Silent+

Univolt 110-250 VAC 50/60Hz
83930 (ASP-MWS+UNI)



Aspen Pumps BTU Calculator

